

Transmittable torque

Power

Operationfactor

M _{ü max}	520	Nm
P _{nenn}	3,00	kW
K _A	3,19	

Ratio

Output speed

Belt speed

Number of teeth drive pully

Number of teeth driven pully

i	26,58	
n _{ab}	55	rpm
v	2,8	m/s
Z ₁	90	-
Z ₂	325	-

Center distance

Belt length

e ₁	585,0	mm
L _{d1}	3048,0	mm

Static axial bearing capacity

Static radial bearing capacity

Dynamic axial bearing capacity


Dynamic radial bearing capacity

C _{0 ax}	964	kN
C _{0 rad}	454	kN
C _{ax}	82	kN
C _{rad}	71	kN

Weight

M	213	kg
---	-----	----

For information only

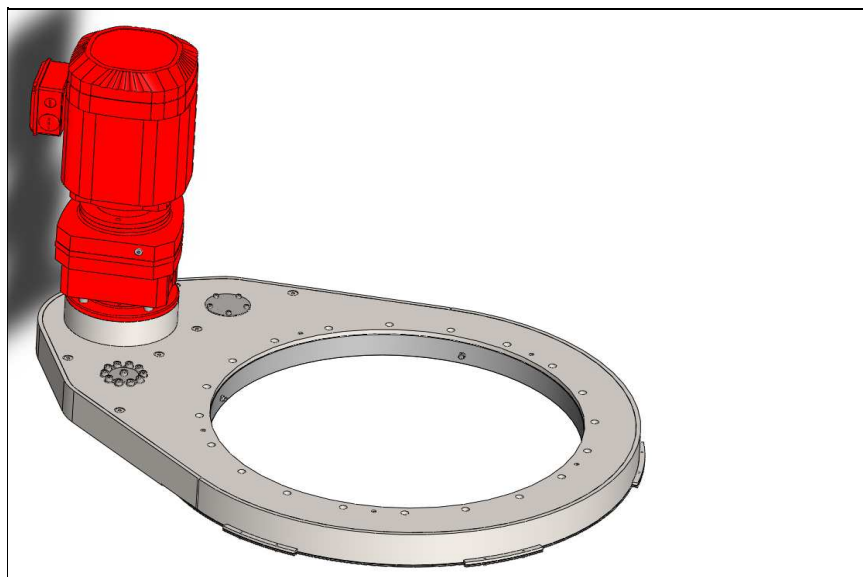

Performance chart

